


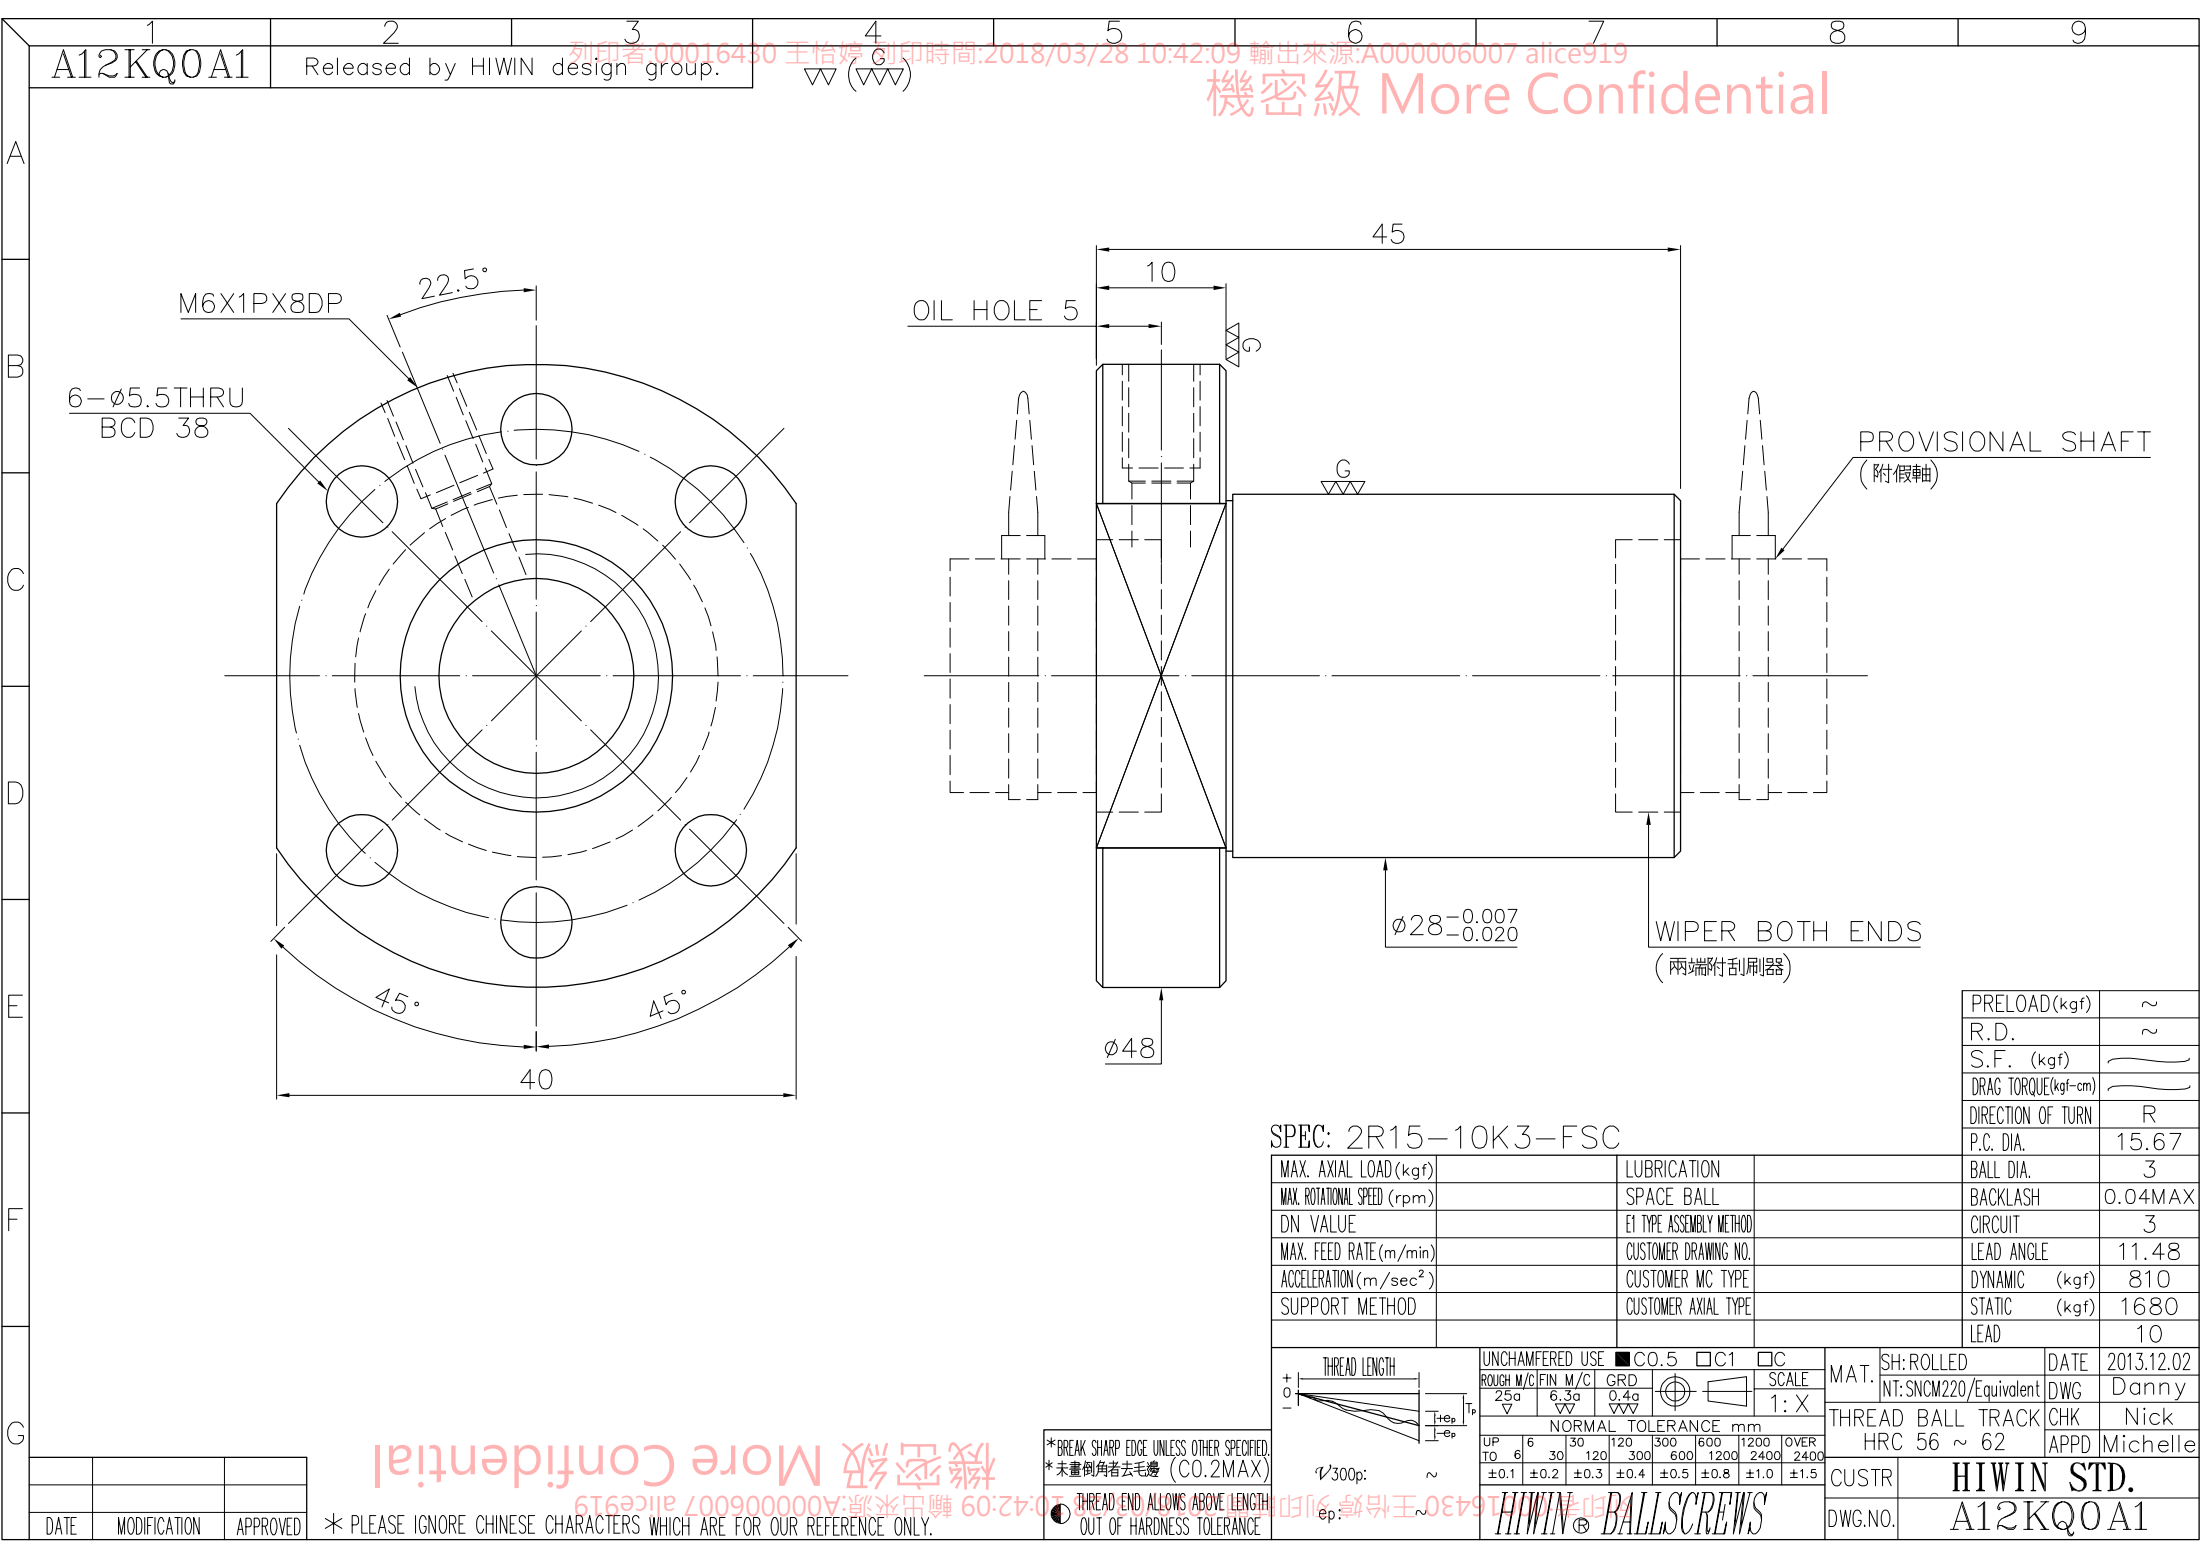

SPEC: 2R15-10K3-FSC

MAX. AXIAL LOAD (kgf)		LUBRICATION		PRELOAD (kgf)	~
MAX. ROTATIONAL SPEED (rpm)		SPACE BALL		R.D.	~
DN VALUE		E1 TYPE ASSEMBLY METHOD		S.F. (kgf)	~
MAX. FEED RATE (m/min)		CUSTOMER DRAWING NO.		DRAG TORQUE (kgf-cm)	~
ACCELERATION (m/sec ²)		CUSTOMER MC TYPE		DIRECTION OF TURN	R
SUPPORT METHOD		CUSTOMER AXIAL TYPE		P.C. DIA.	15.67
				BALL DIA.	3
				BACKLASH	0.04MAX
				CIRCUIT	3
				LEAD ANGLE	11.48
				DYNAMIC (kgf)	810
				STATIC (kgf)	1680
				LEAD	10

THREAD LENGTH		UNCHAMFERED USE ☒ C0.5 ☐ C1 ☐ C		SCALE		MAT. SH: ROLLED		DATE	
+ 0		ROUGH M/C FIN M/C		1: X		NT: SNCM220/Equivalent		2013.12.02	
- 0		GRD		NORMAL TOLERANCE mm		THREAD BALL TRACK		CHK	
		25a 6.3a 0.4a		UP TO 6 30 120 300 600 1200 2400 OVER		HRC 56 ~ 62		APPD	
		±0.1 ±0.2 ±0.3 ±0.4 ±0.5 ±0.8 ±1.0 ±1.5		CUSTR		HIWIN STD.		Nick	
		HIWIN® BALLSCREWS		DWG.NO.		A12KQ0A1		Michelle	