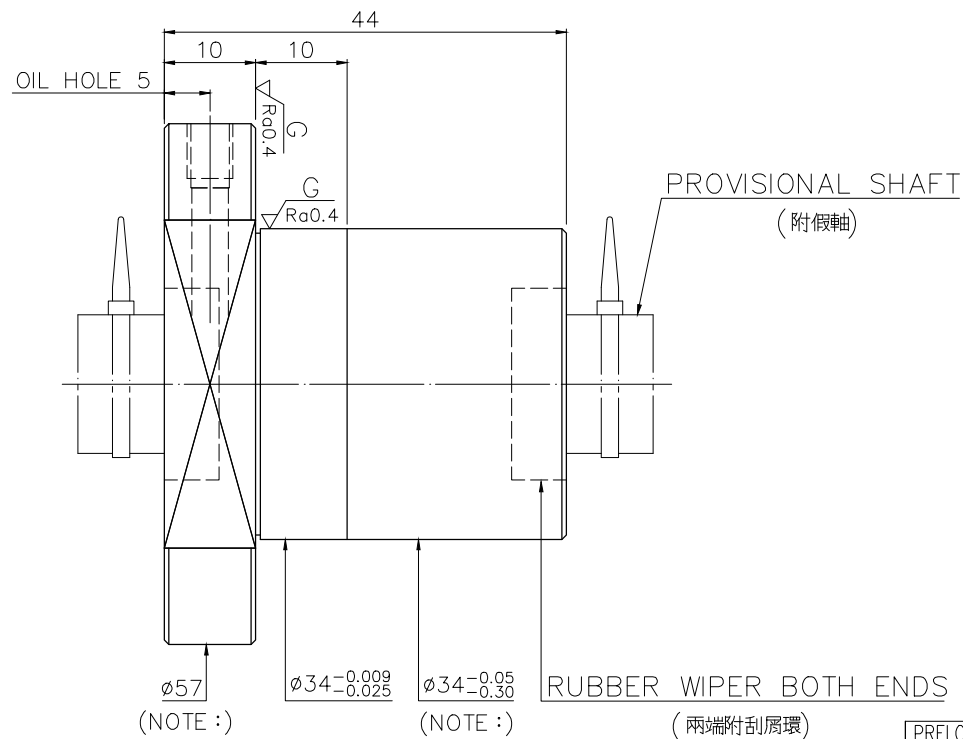
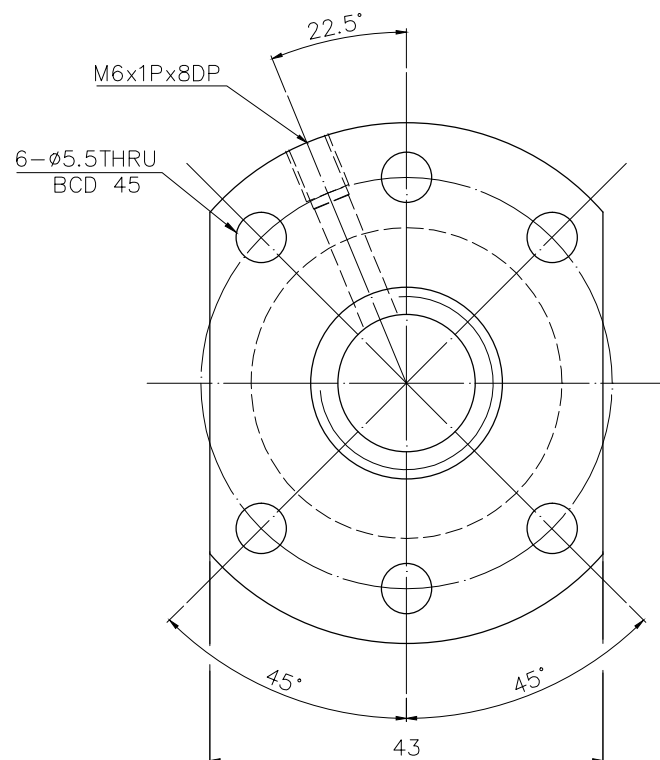


More Confidential


$$\sqrt{\text{Ra}6.3} \quad \left(\sqrt{\text{Ra}0.4}^G \right)$$


NOTE : THIS PART WITHOUT GRINDING.
(此部位不研磨。)

PRELOAD(kgf)	~
R.D.	~
S.F. (kgf)	~
DRAG TORQUE(kgf-cm)	~
DIRECTION OF TURN	R
P.C. DIA.	15.64
BALL DIA.	3.175
BACKLASH CIRCUIT	0.04MAX 3
LEAD ANGLE	11.5
DYNAMIC (kgf)	860
STATIC (kgf)	1740
LEAD	10

SPEC: 2R15-10K3-FSCNW

MAX. AXIAL LOAD(kgf)		LUBRICATION		BALL DIA.	3.175
MAX. ROTATIONAL SPEED (rpm)		SPACE BALL		BACKLASH	0.04MAX
DN VALUE		E1 TYPE ASSEMBLY METHOD		CIRCUIT	3
MAX. FEED RATE(m/min)		CUSTOMER DRAWING NO.		LEAD ANGLE	11.5
ACCELERATION(m/sec ²)		CUSTOMER MC TYPE		DYNAMIC (kgf)	860
SUPPORT METHOD		CUSTOMER AXIAL TYPE		STATIC (kgf)	1740
		端塞型式	不出牙	LEAD	10

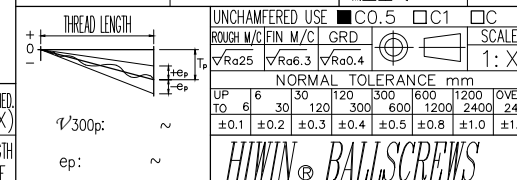

MAT.	SH:ROLLED NT:S55C/Equivalent	DATE	2017.08.29
THREAD BALL TRACK	HRC 56 ~ 62	CHK	Johnson
		APPD	Kelly
CUSTR	HIWIN STD.		
DWG.NO.	A1AA2PA1		

*BREAK SHARP EDGE UNLESS OTHER SPECIFIED
*未畫倒角者去毛邊 (CO.2MAX)

● THREAD END ALLOWS ABOVE LENGTH
OUT OF HARDNESS TOLERANCE

* PLEASE IGNORE CHINESE CHARACTERS WHICH ARE FOR OUR REFERENCE ONLY